

LE2



LE2, 325 x 320 mm

LE2-30, 30 kg x 20 g (10g)

LE2-60, 60 kg x 50 g (20g)

LE2-150, 150 kg x 100 g (50g)


Accuracy for above models, within;

Repeatability + - 0,5 d

Linearity + - 1 d

Corner test + - 1,5d

LE3, LE4

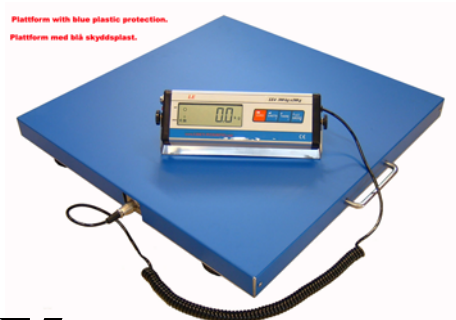

LE3, 450 x 350 mm

LE3-150, 150 kg x 100 g (50g)

LE4, 600 x 600 mm

LE4-300, 300 kg x 200 g (100g)

Accuracy for above models, within;

Repeatability + - 0,5 d

Linearity + - 1 d

Corner test + - 1,5 d

LE5



LE5, 950 x 500 mm

LE5-300, 300 kg x 100 g

Accuracy for LE5 within;

Repeatability + - 1 d

Linearity + - 2 d

Corner test + - 3 d

Above models are equipped with following:

- Extra strong SS platform.
- Indicator bracket for wall or table mount.
- Re-chargeable battery, 10 hours continues use.
- RS-232C.
- 25 mm wide angle “ easy-to-read “ LCD display with backlight.
- NET / GROSS function.
- TARE function.
- Unit conversion.

Ask your local supplier for the very detailed information and offer.